

KYO8GW - KYO8W - KYO4



Panels for small-scale installations

KYO8GW, KYO8W and KYO4 are the smallest control panels of the range.

KYO4 has 4 zones and KYO8W has 8 zones. Especially designed for small domestic and commercial applications.

The KYO8W and KYO8GW panels are compatible with the receivers VRX32-433/868 and Vector/RX8, and with the various kind of wireless devices installation.

FEATURES

- 8 programmable zones (4 for KYO4)
- 6 inputs (4 for KYO4) for vibration and roller-blind detectors
- Up to 8 wireless zones via Vector/RX8 receiver (KYO8W and KYO8GW only)
- 3 programmable 150 mA open-collector outputs (5 x 500 mA outputs on KYO8GW)
- Supports up to 8 keypads on the 4-wire BPI bus
- Supports LED and LCD keypads, PREMIUM Line and CLASSIKA Series
- 24 User codes (from 4 to 6 digits)
- Supports up to 16 readers for keys, cards and tags on the 4-wire BPI bus
- Compatible with ECLIPSE and PROXI proximity readers as well as the reader built into PREMIUM Line keypad
- Manages 128 keys, proximity cards and tags
- 4 independent partitions — all with stay/away control
- Auto-arming on a weekly basis for each partition
- Patrol bypass with auto-Unbypass
- 128 event logger with date and time
- Available with a metal or plastic box


COMMUNICATIONS

- Multi-protocol digital communicator
- Telephone line check
- 8 message voice dialler (requires optional NC2/VOX voice board)
- 8 telephone numbers for central station communications, voice calls and teleservice
- Manages DTMF for full system management via DTMF telephones




BOX PLUS

BOX-M

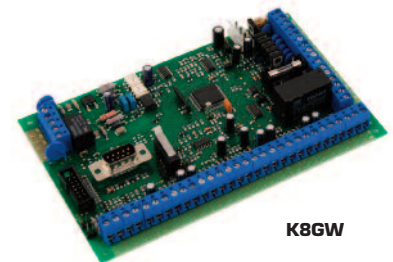

K8GW

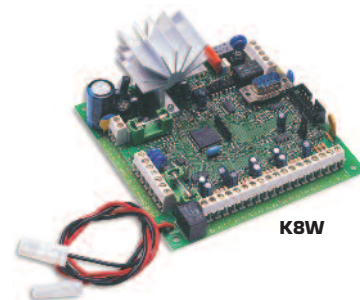

K8W



K4